


CVS-22H

Controller with 2 Variables & ON/OFF

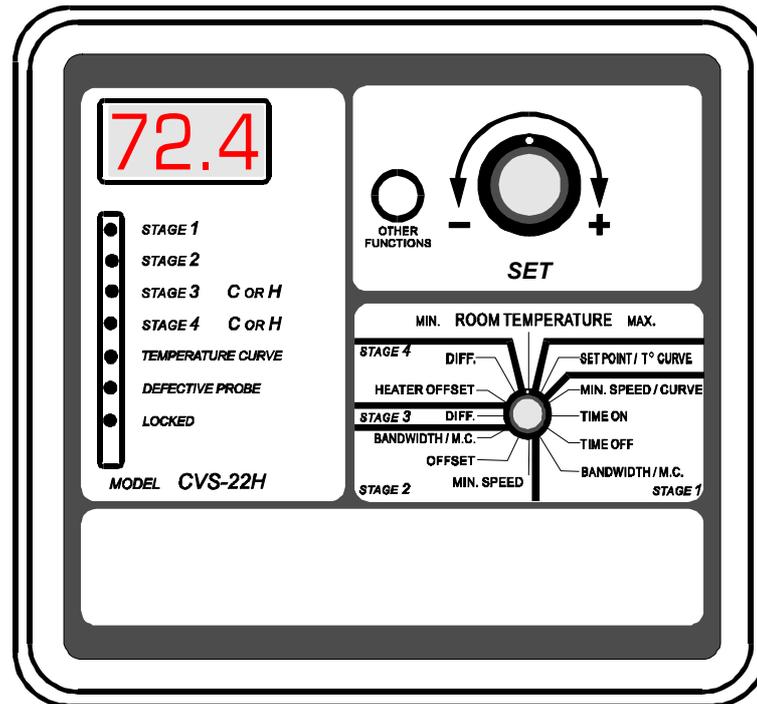

Features

- Digital display with pilot light indicating status
- Timed minimum ventilation de-icing stage 2
- Curve to automatically adjust Set point and Minimum speed
- Up to four inside temperature probes
- Individual probe readout
- Up to two stages of heating
- Computer Compatible
- Overload and overvoltage protection
- Parameter protection (Lock Mode)
- Can be powered with 115/230 Vac (60Hz) or 12Vdc